

Erratum to: "Aqueous Phenol and Ethylene Glycol Solutions in Electrohydrodynamic Liquid Bridging"

Erratum

Mathias Eisenhut^{1,2}, Xinghua Guo²,
Astrid H. Paulitsch-Fuchs¹, Elmar C. Fuchs¹

¹Wetsus – Centre of Excellence for Sustainable Water Technology,
Leeuwarden, The Netherlands

²Institute of Analytical Chemistry and Food Chemistry,
Graz University of Technology, Graz, Austria

Received 24 March 2011; Accepted 28 March 2011

Abstract: The original version of the article was published in Cent. Eur. J. Chem. 9(3) (2011), pp 391-403. Unfortunately, the original version of this article contains mistakes in the caption of the y-axis of Figs. 5, 6 and 10 due to a font conversion problem. The actual units on the y-axis of these figures should be $\mu\text{S cm}^{-1}$, not mS cm^{-1} .

© Versita Sp. z o.o.

Figures with correct axis captions

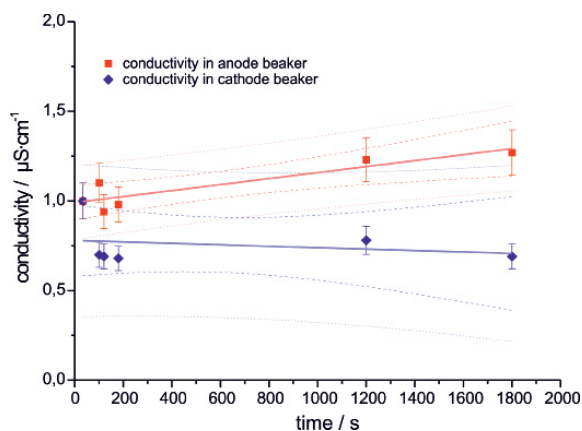


Figure 5. Exp. 1a: Transport of phenol from cathode to anodic beaker, conductivity measurement evaluated with a linear fit including 95% confidence (dashed) and 95% prediction (dotted) intervals.

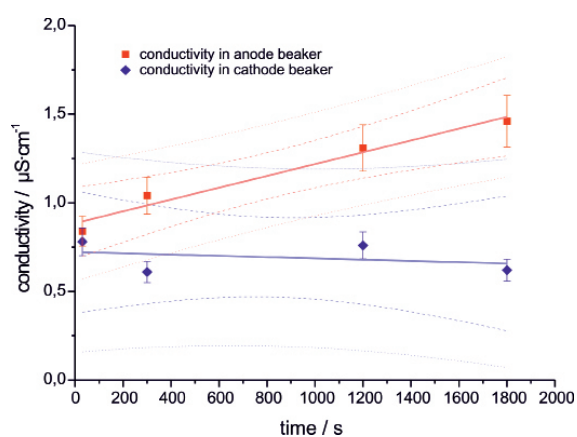


Figure 6. Exp. 1b: Transport of phenol from anodic to cathodic beaker, conductivity measurement evaluated with a linear fit including 95% confidence (dashed) and 95% prediction (dotted) intervals.

* E-mail: elmar.fuchs@wetsus.nl

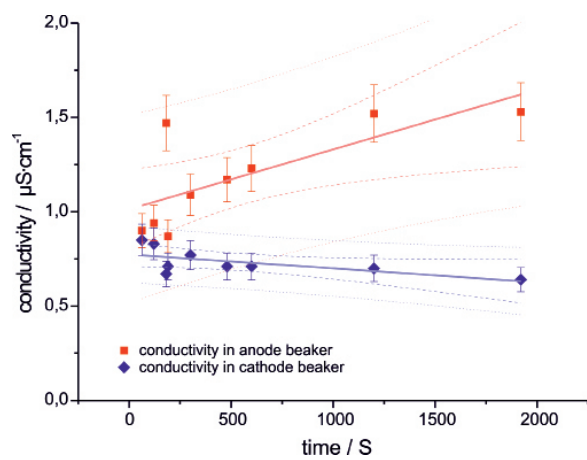


Figure 10. Exp. 2b: Transport of phenol from anodic to cathode beaker, conductivity measurement. The values are evaluated with a linear fit including 95% confidence (dashed) and 95% prediction (dotted) intervals.